


罩极电机

Shaded Pole motors



Model	Bearing	Rating Voltage (VAC)	Freq. (Hz)	Power Current (AMP)	Power Consumption (WATTS)	OUT PUT (WATTS)	Speed (RPM)	Air Flow (m ³ /h)	FAN BLADE (mm)	Weight (kg)	A	B	C	D	E
	● BALL ○ Sleeve														
JD-YZF2-13-26	○ ●	220/240	50/60	0.14	20	2	1300	205	Ø 172	0.8	13	13.5	43	78	-
JD-YZF5-13-26	○ ●	220/240	50/60	0.20	29	5	1300	455	Ø 200	0.8	13	13.5	43	78	-
JD-YZF6-13-26	○ ●	110/120	60	0.55	33	6	1550	510	Ø 200	0.8	13	13.5	43	78	-
JD-YZF7-20-26	○ ●	220/240	50/60	0.23	32	7	1300	640	Ø 230	1.1	19	14	43.5	84.5	-
JD-YZF10-20-26	○ ●	220/240	50/60	0.25	36	10	1300	650	Ø 230	1.1	19	14	43.5	84.5	-
JD-YZF10-20-26	○ ●	110/120	60	0.80	55	10	1550	800	Ø 230	1.1	19	14	43.5	84.5	-
JD-YZF12-20-26	○ ●	220/240	50/60	0.36	54	12	1300	690	Ø 230	1.1	19	14	43.5	84.5	-
JD-YZF16-25-26	○ ●	220/240	50/60	0.45	60	16	1300	760	Ø 254	1.4	25	15.5	45	92	-
JD-YZF18-25-26	○ ●	110/120	60	1.01	70	18	1550	940	Ø 254	1.4	25	15.5	45	92	-
JD-YZF18-30-26	○ ●	220/240	50/60	0.50	70	18	1300	1000	Ø 254	1.5	30	17.5	48.5	100.5	21
JD-YZF18-30-26	○ ●	110/120	60	1.10	75	18	1450	1000	Ø 254	1.5	30	17.5	48.5	100.5	21
JD-YZF25-40-26	○ ●	220/240	50/60	0.70	90	25	1300	1030	Ø 300	1.8	40	18.5	49.5	111.5	31
JD-YZF25-40-26	○ ●	110/120	60	1.40	100	25	1450	1030	Ø 300	1.8	40	18.5	49.5	111.5	31
JD-YZF34-45-26	○ ●	220/240	50/60	0.85	110	34	1300	1210	Ø 300	2.0	45	22.5	53.5	120.5	36
JD-YZF34-45-26	○ ●	110/120	60	1.50	110	34	1450	1210	Ø 300	2.0	45	22.5	53.5	120.5	36

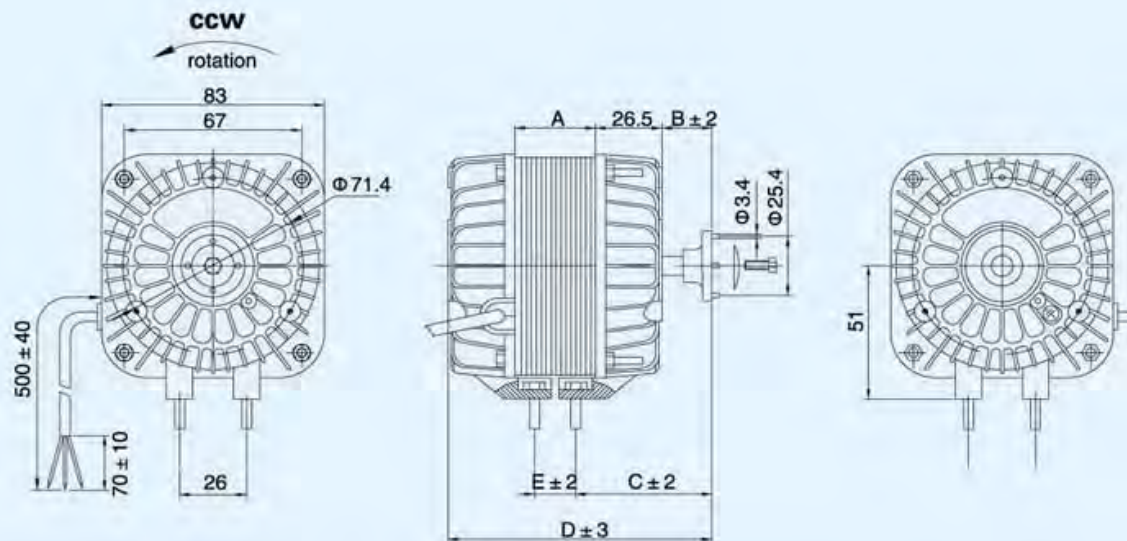

- * all model could be customized on voltage or any other requirements to fit your need
- * [http:// www.jingdafan.com](http://www.jingdafan.com)